

American Pneumatic Tool

9949 Tabor Place, Santa Fe Springs, California, CA 90670, U.S.A.

MODEL 260 SERIES CHIPPING HAMMERS



The APT Chipping Hammers are used for work such as scaling, chiseling, removing concrete build-up from the inside of concrete mixers, light concrete demolition, cement finishing and form stripping.

FEATURES


- New patented Ball Valve design (Pat. # 8,276,682 B2) - more forgiving of dirt and debris, easier to maintain, made from corrosion resistant material
- Ball-type throttle valve less complicated, makes teasing the throttle easier
- Drop forged steel handle and collar
- Deep case hardened alloy steel cylinder
- Replaceable nose bushing
- 2 bolt design for easier field maintenance
- Adjustable exhaust deflector
- Available in 3" and 4" strokes
- Tools come standard with: Standard oval collar retainer (Part # 7022)
 Locking Spring (Part # 1941)
 6 ft Whip hose assembly (Part # 9266)
- Optional quick change retainer systems available are:
 - # 5550 Ball type Retainer with Locking Spring # 18290 Ball type, Bolt-on Retainer

SPECIFICATIONS

Part #	18667	18670	18668	18671		
Nose Bushing	.680 Round	.580 Hex	.680 Round	.580 Hex		
Bore Diameter(inches)	1-1/8"		1-1/8"			
Stroke (inches)	3"		4"			
Blows per Minute	1650		1375			
CFM @ 90 psi	33 - 35		34 - 36			
Weight (lbs)	14		15			
Length (inches)	14-9/16"		15-9/16"			
Air Inlet Size	½" NPT FEMALE					

For assistance in any sales, technical, maintenance or repair questions, please call APT @ Phone (800) 532-7402 or (562) 204-1555 ● Fax (800) 715-6502 or (562) 204-1773



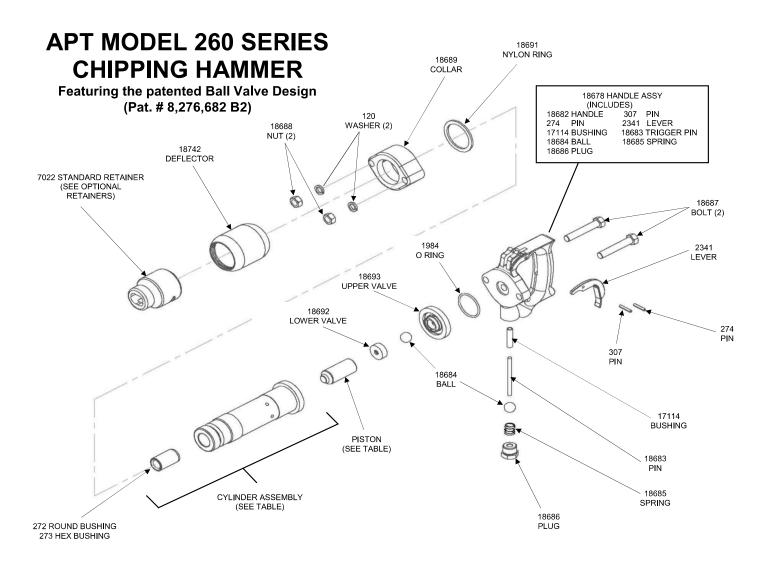

2 BOLT CHIPPING HAMMER					
MODEL	CYLINDER ASSEMBLY	PISTON			
M263, 3" STROKE, ROUND BUS M263, 3" STROKE, HEX BUSHII M264, 4" STROKE, ROUND BUS M264, 4" STROKE, HEX BUSHII	NG 18676 SHING 18674	1534 1534 703 703			

For assistance in any sales, technical, maintenance or repair questions, please call APT @ Phone (800) 532-7402 or (562) 204-1555 ● Fax (800) 715-6502 or (562) 204-1773